

Report No. : 108-ISOQA-23-0835 **Rev.** : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting



SAFETY COMPLIANCE TESTING FOR FMVSS 108

Lamps, Reflective Devices, and Associated Equipment

* * * * *

ISOQA Technical Service Co., Ltd.

60, Yong Long Road,
Da-Li, Taichung, 41257
Taiwan

TEST REPORT

- This report becomes effective when the signatory signs it and affixed the seal to the document.
- No part of this report may be altered and may not be reproduced except in full without the written approval of the test laboratory.
- The specification and basic data of this test report are provided by the applicant. The applicant shall be responsible for it if the information provided is incorrect and effects the test results.
- The test results only apply to the test sample(s) received.
- The test samples are selected and provided by the applicant or manufacturer. The laboratory does not responsible for implement sampling.
- The decision rule is inherent in the requested specification or standard, a further consideration of the level of risk and MU is not necessary.



Signature of Responsible Laboratory Official

Title: Laboratory Manager

Approval Date

Report No. : 108-ISOQA-23-0835 **Rev.** : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting

TABLE OF CONTENTS

Contents	Number of page in each report
Cover Page	1
Contents	1
Product information	1
Rear Turn Signal Lamp	4
Tail Lamp	5
Stop Lamp	4
Backup Lamp	4
Drawing	2
Revision History	1
Total Pages	23

Report Prepared By : Jenny Zhou
Review By : Julie Wu
Approval By : Arthur Chang

Report No. : 108-ISOQA-23-0835 **Rev.** : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting



PRODUCT INFORMATION

Test Component	LF740/LF745
Applicant	Morimoto Lighting 2281 Defoor Hills Rd Atlanta GA 30318, United States
Manufacturer	Zhejiang Hongguan Lighting Technology Co., Ltd. No. 185, Fengdu 2nd Road, Tangxia Town, Rui'an City, Zhejiang Province 325200, China
Trade Mark	MORIMOTO
Lens Material	Plastic
Coating of Exterior Lens	---
Inner Lens Material	---
Reflex Reflector Material	---
Applicable Vehicle	Chevy Silverado 2014-2018
Rated Voltage	12 V
Marking on Lens	---
Marking on Housing	---
Method of Mounting to Vehicle	bolted

* Above-mentioned information is provided by the applicant ('---' = not applicable or no information provided)

Functions	Rear Turn Signal Lamp	Tail Lamp	Stop Lamp	Backup Lamp		
Requirements	FMVSS 108	FMVSS 108	FMVSS 108	FMVSS 108		
SAE Standards for Reference	SAE J588	SAE J585	SAE J586	SAE J593		
Identification Code of SAE J759	I	T	S	R		
Number of Compartments or Lamps	1	1	1	1		
Color of External Lens	Clear	LF745: Smoke LF740: Red	Clear	Clear		
Color of Inner Lens or Filter	Clear	Clear	Clear	Clear		
Color of Light Emitted	Yellow	Red	Red	White		
Light Source Designation	LED x 12	LED x 2	LED x 12	LED x 4		
Design Voltage	12.8 V	12.8 V	12.8 V	12.8 V		
Rated Mean Spherical Candlepower	N/A	N/A	N/A	N/A		
Effective projected illuminated area of lens (mm ²)	5400	N/A	5400	N/A		
Method of determination	Projected	N/A	Projected	N/A		
Test Item	Inspector	Date	Number of Tested			
Physical Inspection	Tan Liao	2023/11/1	2	2	2	2
Photometry Test	Tan Liao	2023/11/1	2	2	2	2
Color Test	Tan Liao	2023/11/2	2	2	2	2

** Upon the applicant's request, the examination is conducted to check whether the test component(s) is in compliance with the photometric and color requirements of the FMVSS 108. Functions and/or test items not included in this test report, if any, will not be considered.
The issuance of this report does not denote or imply that the test component(s) complies with other requirements of FMVSS 108.

Report No. : 108-ISOQA-23-0835 Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting

TURN SIGNAL LAMP TEST REPORT

Test Component	LF740/LF745
Applicant	Morimoto Lighting
Test Laboratory	ISOQA Technical Service Co., Ltd.
Test Date	2023/11/1 - 2023/11/2
Report Number	108-ISOQA-23-0835
Number of devices tested	See below
Light source Designation	LED x 12

SUMMARY

Test Description	Test Results	
	Number Passed	Number Failed
- Physical Inspection	2	-
- Photometry Test	2	-
- Color Test	2	-
- Dust Test	Not Tested	-
- Moisture Test	Not Tested	-
- Corrosion Test	Not Tested	-
- Vibration Test	Not Tested	-

Remarks : _____



Signature of Responsible Laboratory Official

Title : Laboratory Manager

Date: : November 9, 2023

Report No. : 108-ISOQA-23-0835 **Rev.** : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting

PHYSICAL INSPECTION

Inspection Performed by : Tan Liao Date : 2023/11/1

Marking on Lens	---	
Marking on Housing	---	
Lens Material	Plastic	
Coating of External Lens	---	
Light Sources Used	Trade No/ Designation	LED
	Quantity	12
	Rated Voltage	12 V

Remarks : _____

EFFECTIVE PROJECTED LUMINOUS LENS AREA

Test Performed by : Tan Liao Date : 2023/11/1

Vehicle Type	Passenger cars, multipurpose passenger vehicles, trucks, trailers, and buses of less than 2032 mm in overall width		
Method of determination	Projected		
Effective projected illuminated area of lens (mm ²)	Requirement	Value	Result
	5000	5400	PASSED

Remarks : _____

Report No. : 108-ISOQA-23-0835 Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting



PHOTOMETRY TEST

Test Performed by : Tan Liao Date : 2023/11/1
 Test distance(m) : 3.182 m Light Source Designation : LED x 12
 Tested Voltage : 12.8 V Lighted Sections : 3

Steady Burning at H-V (according to SAE J1889)	Sample 1 (RH)			Sample 2 (LH)		
	1 min.	Steady	Ratio	1 min.	Steady	Ratio
	231.7	230.5	1.01	206.4	205.3	1.01

Test Points	Zone	Rto.	Minimum (cd)	Maximum (cd)	Sample 1 (RH)		Sample 2 (LH)	
		Tail Lamp			Rto	Measured ⁽¹⁾	Rto	Measured ⁽¹⁾
5U - 20L	1	3	25	900	28.1	127.800	17.5	92.900
5D - 20L	1	3	25	900	17.4	139.700	10.3	86.400
10U - 5L	1	3	35	900	30.1	141.600	25.2	126.500
10D - 5L	1	3	35	900	42.8	163.800	46.2	141.500
5U - 10L	2	3	65	900	20.9	165.800	14.7	142.400
H - 10L	2	3	90	900	14.7	200.400	10.0	166.600
5D - 10L	2	3	65	900	13.6	187.400	11.5	147.100
5U - V	3	5	150	900	13.4	191.300	13.3	171.100
H - 5L	3	5	175	900	11.9	219.000	9.7	190.100
H - V	3	5	175	900	10.4	230.500	10.0	205.300
H - 5R	3	5	175	900	10.4	227.800	10.6	206.900
5D - V	3	3	150	900	13.7	198.800	13.1	187.700
5U - 10R	4	3	65	900	12.7	193.800	16.4	171.100
H - 10R	4	3	90	900	10.5	200.900	12.4	198.300
5D - 10R	4	3	65	900	18.8	164.100	16.1	185.200
10U - 5R	5	3	35	900	22.2	140.200	26.8	140.000
10D - 5R	5	3	35	900	50.1	152.000	43.9	163.100
5U - 20R	5	3	25	900	12.0	135.900	21.6	141.600
5D - 20R	5	3	25	900	29.5	101.700	18.3	143.800
Visibility			0.3	900	-	(14.500) 232.384	-	(3.186) 208.369

Zone Total Luminous Intensity

Zone	Minimum (cd)	Sample 1 (RH)	Sample 2 (LH)
1	120	572.900	447.300
2	220	553.600	456.100
3	825	1067.400	961.100
4	220	558.800	554.600
5	120	529.800	588.500

(1) The measured values at each individual test point shall not be less than 60% of the required minimum value shown for that individual test point location. The sum of the luminous intensity measurements at each test point within a zone shall not be less than the Zone Total Luminous Intensity shown.

Report No. : 108-ISOQA-23-0835 Rev. : 00


Test Component : LF740/LF745

Applicant : Morimoto Lighting

COLOR TEST

Test Performed by : Tan Liao Date : 2023/11/2
Test distance(m) : 3.182 m Light Source Designation : LED x 12
Color of Light Emitted : Yellow

Color emitted from HV point	Sample 1 (RH)		Sample 2 (LH)
	x=	0.5790	0.5783
	y=	0.4124	0.4130

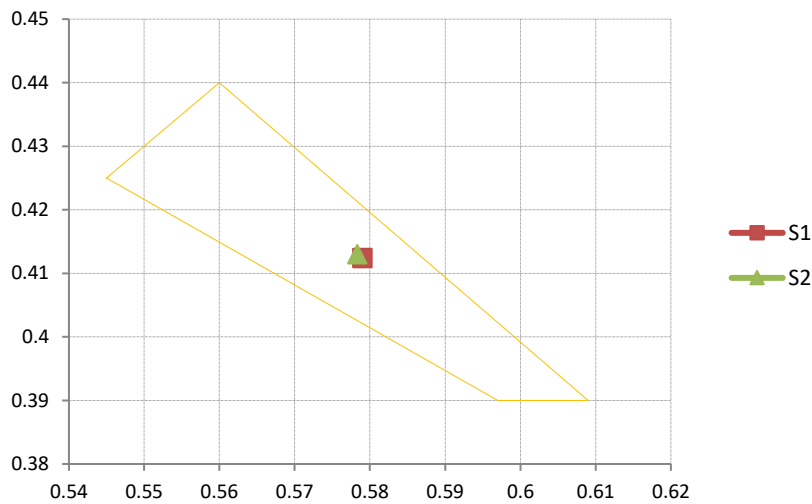

Remarks : _____

Report No. : 108-ISOQA-23-0835 Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting

TAIL LAMP TEST REPORT

Test Component	LF740/LF745
Applicant	Morimoto Lighting
Test Laboratory	ISOQA Technical Service Co., Ltd.
Test Date	2023/11/1 - 2023/11/2
Report Number	108-ISOQA-23-0835
Number of devices tested	See below
Light source Designation	LED x 2

SUMMARY

Test Description	Test Results	
	Number Passed	Number Failed
- Physical Inspection	2	-
- Photometry Test	2	-
- Color Test	2	-
- Dust Test	Not Tested	-
- Moisture Test	Not Tested	-
- Corrosion Test	Not Tested	-
- Vibration Test	Not Tested	-

Remarks : _____



Signature of Responsible Laboratory Official

Title : Laboratory Manager

Date: : November 9, 2023

Report No. : 108-ISOQA-23-0835 **Rev.** : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting



PHYSICAL INSPECTION

Inspection Performed by : Tan Liao Date : 2023/11/1

Marking on Lens	---	
Marking on Housing	---	
Lens Material	Plastic	
Coating of External Lens	---	
Light Sources Used	Trade No/ Designation	LED
	Quantity	2
	Rated Voltage	12 V

Remarks : _____

Report No. : 108-ISOQA-23-0835 Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting



PHOTOMETRY TEST - CLEAR LENS

Test Performed by : Tan Liao Date : 2023/11/1
 Test distance(m) : 3.182 m Light Source Designation : LED x 2
 Tested Voltage : 12.8 V Lighted Sections : 3

Steady Burning at H-V (according to SAE J1889)	Sample 1 (RH) - Clear Lens			Sample 2 (LH) - Clear Lens		
	1 min.	Steady	Ratio	1 min.	Steady	Ratio
	22.25	22.13	1.01	21.16	20.60	1.03

Test Points	Zone	Minimum (cd)	Maximum (cd)	Sample 1 (RH) - Clear Lens	Sample 2 (LH) - Clear Lens
				Measured ⁽¹⁾	Measured ⁽¹⁾
5U - 20L	1	0.7	25	4.544	5.301
5D - 20L	1	0.7	-	8.040	8.350
10U - 5L	1	1	25	4.711	5.015
10D - 5L	1	1	-	3.826	3.061
5U - 10L	2	2	25	7.940	9.680
H - 10L	2	2	25	13.630	16.730
5D - 10L	2	2	-	13.750	12.810
5U - V	3	4.5	25	14.310	12.840
H - 5L	3	5	25	18.350	19.660
H - V	3	5	25	22.130	20.600
H - 5R	3	5	25	21.890	19.570
5D - V	3	4.5	-	14.530	14.310
5U - 10R	4	2	25	15.260	10.420
H - 10R	4	2	25	19.060	15.960
5D - 10R	4	2	-	8.720	11.520
10U - 5R	5	1	25	6.326	5.220
10D - 5R	5	1	-	3.036	3.715
5U - 20R	5	0.7	25	11.370	6.563
5D - 20R	5	0.7	-	3.450	7.870
Visibility below HH		0.05	-	(0.167)	(0.152)
Visibility on or above HH		0.05	25	(0.925) 22.312	(1.194) 20.729

Zone Total Luminous Intensity

Zone	Minimum (cd)	Sample 1 (RH) - Clear Lens	Sample 2 (LH) - Clear Lens
1	3.5	21.121	21.727
2	6	35.320	39.220
3	24	91.210	86.980
4	6	43.040	37.900
5	3.5	24.182	23.368

(1) The measured values at each individual test point shall not be less than 60% of the required minimum value shown for that individual test point location. The sum of the luminous intensity measurements at each test point within a zone shall not be less than the Zone Total Luminous Intensity shown.

Report No. : 108-ISOQA-23-0835 Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting



PHOTOMETRY TEST - SMOKE LENS

Test Performed by : Tan Liao Date : 2023/11/1
 Test distance(m) : 3.182 m Light Source Designation : LED x 2
 Tested Voltage : 12.8 V Lighted Sections : 3

Steady Burning at H-V (according to SAE J1889)	Sample 1 (RH) - Smoke Lens			Sample 2 (LH) - Smoke Lens		
	1 min.	Steady	Ratio	1 min.	Steady	Ratio
	12.21	12.1	1.01	9.33	9.25	1.01

Test Points	Zone	Minimum (cd)	Maximum (cd)	Sample 1 (RH) - Smoke Lens	Sample 2 (LH) - Smoke Lens
				Measured ⁽¹⁾	Measured ⁽¹⁾
5U - 20L	1	0.7	25	3.303	2.763
5D - 20L	1	0.7	-	4.440	3.143
10U - 5L	1	1	25	2.921	2.556
10D - 5L	1	1	-	1.963	1.592
5U - 10L	2	2	25	5.112	5.054
H - 10L	2	2	25	8.280	7.558
5D - 10L	2	2	-	7.199	5.114
5U - V	3	4.5	25	7.377	6.421
H - 5L	3	5	25	10.390	8.770
H - V	3	5	25	12.100	9.250
H - 5R	3	5	25	11.820	8.250
5D - V	3	4.5	-	7.842	6.654
5U - 10R	4	2	25	6.642	4.588
H - 10R	4	2	25	10.300	6.562
5D - 10R	4	2	-	6.116	6.065
10U - 5R	5	1	25	3.175	2.579
10D - 5R	5	1	-	1.742	1.528
5U - 20R	5	0.7	25	3.932	2.769
5D - 20R	5	0.7	-	3.808	3.723
Visibility below HH		0.05	-	(0.058)	(0.075)
Visibility on or above HH		0.05	25	(0.677) 12.129	(0.422) 9.419

Zone Total Luminous Intensity

Zone	Minimum (cd)	Sample 1 (RH) - Smoke Lens	Sample 2 (LH) - Smoke Lens
1	3.5	12.627	10.054
2	6	20.591	17.726
3	24	49.529	39.345
4	6	23.058	17.215
5	3.5	12.657	10.599

(1) The measured values at each individual test point shall not be less than 60% of the required minimum value shown for that individual test point location. The sum of the luminous intensity measurements at each test point within a zone shall not be less than the Zone Total Luminous Intensity shown.

Report No. : 108-ISOQA-23-0835 Rev. : 00


Test Component : LF740/LF745

Applicant : Morimoto Lighting

COLOR TEST

Test Performed by : Tan Liao Date : 2023/11/2
Test distance(m) : 3.182 m Light Source Designation : LED x 2
Color of Light Emitted : Red

Color emitted from HV point		Sample 1 (RH)	Sample 2 (LH)
Clear Lens	x=	0.7041	0.7018
	y=	0.2955	0.2981
Smoke Lens	x=	0.7006	0.7000
	y=	0.2992	0.2999

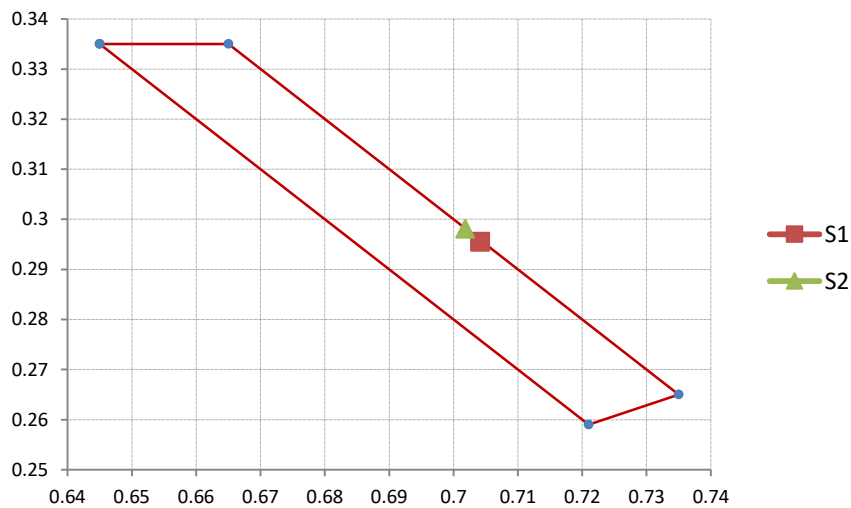

Remarks :

Report No. : 108-ISOQA-23-0835 Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting

STOP LAMP TEST REPORT

Test Component	LF740/LF745
Applicant	Morimoto Lighting
Test Laboratory	ISOQA Technical Service Co., Ltd.
Test Date	2023/11/1 - 2023/11/2
Report Number	108-ISOQA-23-0835
Number of devices tested	See below
Light source Designation	LED x 12

SUMMARY

Test Description	Test Results	
	Number Passed	Number Failed
- Physical Inspection	2	-
- Photometry Test	2	-
- Color Test	2	-
- Dust Test	Not Tested	-
- Moisture Test	Not Tested	-
- Corrosion Test	Not Tested	-
- Vibration Test	Not Tested	-

Remarks : _____



Signature of Responsible Laboratory Official

Title : Laboratory Manager

Date: : November 9, 2023

Report No. : 108-ISOQA-23-0835 **Rev.** : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting

PHYSICAL INSPECTION

Inspection Performed by : Tan Liao Date : 2023/11/1

Marking on Lens	---	
Marking on Housing	---	
Lens Material	Plastic	
Coating of External Lens	---	
Light Sources Used	Trade No/ Designation	LED
	Quantity	12
	Rated Voltage	12 V

Remarks : _____

EFFECTIVE PROJECTED LUMINOUS LENS AREA

Test Performed by : Tan Liao Date : 2023/11/1

Vehicle Type	Passenger cars, multipurpose passenger vehicles, trucks, trailers, and buses of less than 2032 mm in overall width		
Method of determination	Projected		
Effective projected illuminated area of lens (mm ²)	Requirement	Value	Result
	5000	5400	PASSED

Remarks : _____

Report No. : 108-ISOQA-23-0835 Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting



PHOTOMETRY TEST

Test Performed by	: Tan Liao	Date	: 2023/11/1
Test distance(m)	: 3.182 m	Light Source Designation	: LED x 12
Tested Voltage	: 12.8 V	Lighted Sections	: 3

Steady Burning at H-V (according to SAE J1889)	Sample 1 (RH)			Sample 2 (LH)		
	1 min.	Steady	Ratio	1 min.	Steady	Ratio
		139.1	119.1	1.17	136.7	115.4

Test Points	Zone	Rto.	Minimum (cd)	Maximum (cd)	Sample 1 (RH)		Sample 2 (LH)	
		Tail Lamp			Rto	Measured ⁽¹⁾	Rto	Measured ⁽¹⁾
5U - 20L	1	3	15	420	18.2	82.800	9.6	50.650
5D - 20L	1	3	15	420	9.8	78.420	5.6	46.910
10U - 5L	1	3	22	420	19.8	93.300	17.0	85.500
10D - 5L	1	3	22	420	22.2	85.100	25.2	77.170
5U - 10L	2	3	40	420	13.1	104.400	8.2	79.600
H - 10L	2	3	55	420	8.3	113.500	5.1	85.600
5D - 10L	2	3	40	420	7.0	95.900	6.0	76.640
5U - V	3	5	95	420	7.5	107.900	8.3	106.100
H - 5L	3	5	110	420	6.6	121.100	5.6	110.500
H - V	3	5	110	420	5.4	119.100	5.6	115.400
H - 5R	3	5	110	420	5.0	109.900	6.0	117.400
5D - V	3	3	95	420	6.7	97.500	7.0	99.600
5U - 10R	4	3	40	420	6.1	93.300	11.2	116.400
H - 10R	4	3	55	420	4.8	92.400	7.6	120.600
5D - 10R	4	3	40	420	8.9	77.200	9.0	104.000
10U - 5R	5	3	22	420	13.2	83.400	17.9	93.200
10D - 5R	5	3	22	420	25.4	77.050	25.0	92.700
5U - 20R	5	3	15	420	5.6	63.670	15.1	98.800
5D - 20R	5	3	15	420	14.6	50.470	11.0	86.700
Visibility			0.3	420	-	(2.430) 122.194	-	(2.671) 122.132

Zone Total Luminous Intensity

Zone	Minimum (cd)	Sample 1 (RH)	Sample 2 (LH)
1	70	339.620	260.230
2	135	313.800	241.840
3	520	555.500	549.000
4	135	262.900	341.000
5	70	274.590	371.400

(1) The measured values at each individual test point shall not be less than 60% of the required minimum value shown for that individual test point location. The sum of the luminous intensity measurements at each test point within a zone shall not be less than the Zone Total Luminous Intensity shown.

Report No. : 108-ISOQA-23-0835 Rev. : 00


Test Component : LF740/LF745

Applicant : Morimoto Lighting

COLOR TEST

Test Performed by : Tan Liao Date : 2023/11/2
Test distance(m) : 3.182 m Light Source Designation : LED x 12
Color of Light Emitted : Red

Color emitted from HV point		Sample 1 (RH)	Sample 2 (LH)
	x=	0.7010	0.7000
	y=	0.2987	0.2998

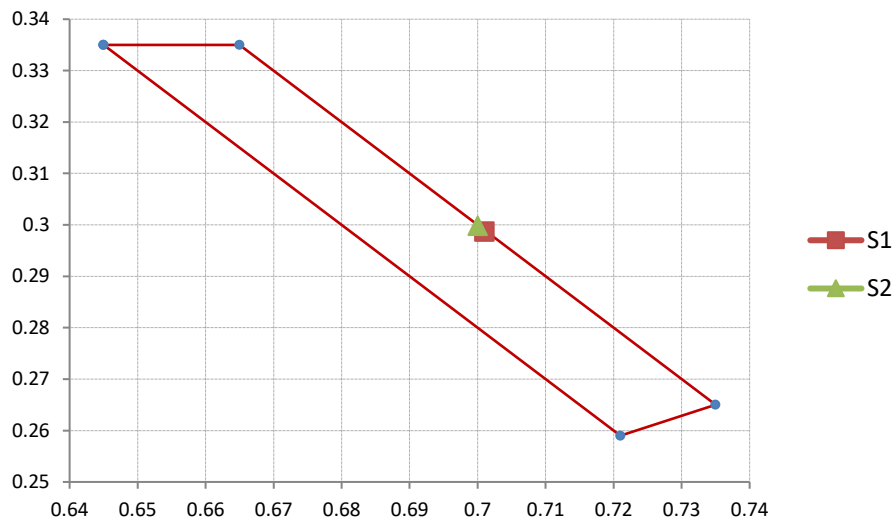

Remarks :

Report No. : 108-ISOQA-23-0835 Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting

BACKUP LAMP TEST REPORT

Test Component	LF740/LF745
Applicant	Morimoto Lighting
Test Laboratory	ISOQA Technical Service Co., Ltd.
Test Date	2023/11/1 - 2023/11/2
Report Number	108-ISOQA-23-0835
Number of devices tested	See below
Light source Designation	LED x 4

SUMMARY

Test Description	Test Results	
	Number Passed	Number Failed
- Physical Inspection	2	-
- Photometry Test	2	-
- Color Test	2	-
- Dust Test	Not Tested	-
- Moisture Test	Not Tested	-
- Corrosion Test	Not Tested	-
- Vibration Test	Not Tested	-

Remarks : _____



Signature of Responsible Laboratory Official

Title : Laboratory Manager

Date: : November 9, 2023

Report No. : 108-ISOQA-23-0835 **Rev.** : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting



PHYSICAL INSPECTION

Inspection Performed by : Tan Liao Date : 2023/11/1

Marking on Lens	---	
Marking on Housing	---	
Lens Material	Plastic	
Coating of External Lens	---	
Light Sources Used	Trade No/ Designation	LED
	Quantity	4
	Rated Voltage	12 V

Remarks : _____

Report No. : 108-ISOQA-23-0835 Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting



PHOTOMETRY TEST

Test Performed by : Tan Liao Date : 2023/11/1
 Test distance(m) : 3.182 m Light Source Designation : LED x 4
 Tested Voltage : 12.8 V Lighted Sections : -

Steady Burning at H-V (according to SAE J1889)	Sample 1 (RH)			Sample 2 (LH)		
	1 min.	Steady	Ratio	1 min.	Steady	Ratio
	144.1	143.9	1.00	147.8	147.1	1.00

Test Points	Zone	Two Lamps System		Sample 1 (RH)	Sample 2 (LH)
		Minimum (cd)	Maximum (cd)	Measured	Measured
5U - 45L	1	15	300	25.430	16.320
H - 45L	1	15	300	28.050	15.610
5D - 45L	1	15	-	26.680	15.870
H - 30L	2	25	300	59.420	44.080
5D - 30L	2	25	-	54.120	39.850
10U - 10L	3	10	300	73.430	104.200
10U - V	3	15	300	83.700	133.600
10U - 10R	3	10	300	78.300	132.700
5U - 10L	3	20	300	111.200	131.500
5U - V	3	25	300	123.900	160.400
5U - 10R	3	20	300	107.500	146.700
H - 10L	4	50	300	132.300	125.900
H - V	4	80	300	143.900	147.100
H - 10R	4	50	300	119.300	133.800
5D - 10L	4	50	-	113.400	102.400
5D - V	4	80	-	124.400	115.900
5D - 10R	4	50	-	105.100	101.100
H - 30R	5	25	300	44.500	60.530
5D - 30R	5	25	-	42.240	48.560
5U - 45R	6	15	300	15.590	31.190
H - 45R	6	15	300	17.080	27.330
5D - 45R	6	15	-	15.280	23.240
Maximum		-	300	146.104	161.385

Zone Total Luminous Intensity

Zone	Minimum (cd)	Sample 1 (RH)	Sample 2 (LH)
1	45	80.160	47.800
2	50	113.540	83.930
3	100	578.030	809.100
4	360	738.400	726.200
5	50	86.740	109.090
6	45	47.950	81.760

(1) The measured values at each individual test point shall not be less than 60% of the required minimum value shown for that individual test point location. The sum of the luminous intensity measurements at each test point within a zone shall not be less than the Zone Total Luminous Intensity shown.

Report No. : 108-ISOQA-23-0835 Rev. : 00


Test Component : LF740/LF745

Applicant : Morimoto Lighting

COLOR TEST

Test Performed by : Tan Liao Date : 2023/11/2
Test distance(m) : 3.182 m Light Source Designation : LED x 4
Color of Light Emitted : White

Color emitted from HV point	Sample 1 (RH)		Sample 2 (LH)
	x=	0.3834	0.3830
	y=	0.3926	0.3949

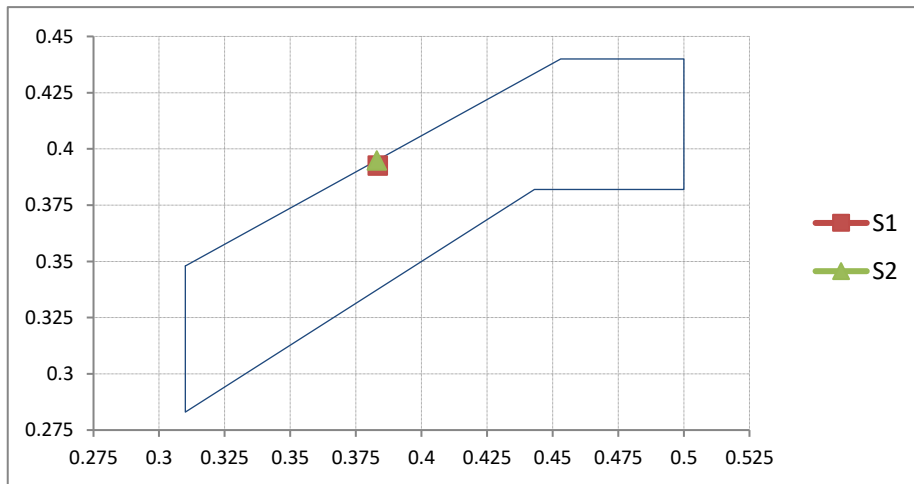

Remarks :

Report No. : 108-ISOQA-23-0835

Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting

DRAWING / PHOTO

LF740 (Red Lens)



Front View



Side View



Top View



Rear View

Report No. : 108-ISOQA-23-0835

Rev. : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting

LF745 (Smoke Lens)



Front View



Side View



Top View



Rear View

Report No. : 108-ISOQA-23-0835 **Rev.** : 00

Test Component : LF740/LF745

Applicant : Morimoto Lighting



REVISION HISTORY

Version	Issued Date	Description
00	November 9, 2023	Initial issue of the test report.